


Ideal for use in warehouses, manufacturing processes, and production facilities, Cruiser CCT counting scales are practical for any counting application. Quickly check the number of pieces in a carton or container to reduce waste when filling orders or packing shipments. Intuitive software is user-friendly and keeps track of the count, automatically optimising the unit weight for greater accuracy. For fast configuration and easy operation, the CCT stores up to 140 PLUs in memory. The programmable backlit display can be customised to be “always on,” “always off” or to light only when weighing.

With easy operation and a durable design, the Cruiser counting scale provides a powerful solution for industrial needs

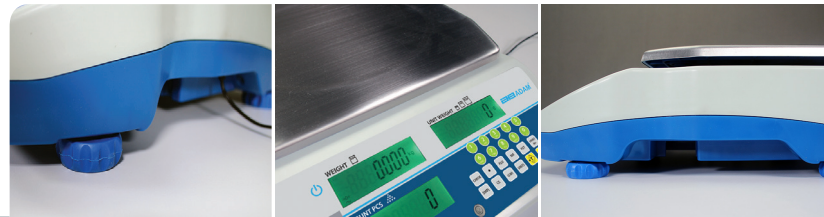

Features

- Backlit LCD shows weight, unit weight and count in one convenient location
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- RS-232 interface is available to provide speedy connection to computers and printers
- Optional USB interface simplifies data communication
- Solid ABS housing is durable for industrial use
- Adjustable levelling feet help optimise setup
- Built-in memory for storing products and settings
- External calibration allows for verification and adjustment with weights
- Internal counting resolution 1:600,000 for precise results
- Parts counting optimisation automatically refines piece weight as parts are added
- Parts counting with freely selectable sample sizes
- Preset tare function speeds the process of repetitive weighing
- Programmable for counting to a preset number of parts
- AC adapter included
- Programmable auto power-off to save energy
- Rechargeable battery included for operation almost anywhere

Applications

- Weighing
- Parts counting
- Check counting

About ADAM:

For more than 45 years, professionals worldwide have relied on Adam Equipment for an extensive selection of dependable and affordable weighing equipment. Adam provides the right balance of speed, performance and value.

Model	CCT 4	CCT 8	CCT 16	CCT 32	CCT 48	CCT 8UH	CCT 16UH	CCT 32UH	CCT 48UH
Capacity	8lb / 4kg	16lb / 8kg	35lb / 16kg	70lb / 32kg	100lb / 48kg	16lb / 8000g	35lb / 16kg	70lb / 32kg	100lb / 48kg
Readability	0.0002lb / 0.1g	0.0005lb / 0.2g	0.001lb / 0.5g	0.002lb / 1g	0.005lb / 2g	0.0001lb / 0.05g	0.0002lb / 0.1g	0.0005lb / 0.2g	0.001lb / 0.5g
Repeatability (S.D.)	0.0004lb / 0.2g	0.001lb / 0.4g	0.002lb / 1g	0.004lb / 2g	0.01lb / 4g	0.0002lb / 0.1g	0.0004lb / 0.2g	0.001lb / 0.4g	0.002lb / 1g
Linearity (+/-)	0.0006lb / 0.3g	0.001lb / 0.6g	0.003lb / 1.5g	0.006lb / 3g	0.01lb / 6g	0.0006lb / 0.3g	0.001lb / 0.6g	0.002lb / 1.2g	0.006lb / 3g
Pan Size	8.3"x11.8" / 210x300mm								
Weighing Units	g, kg, lb								
Stabilisation Time (sec)	2								
Interface	RS-232, Optional USB								
Calibration	External calibration								
Display	Backlit LCD with 0.6"/ 15mm -high digits								
Power Supply	12VDC 50/60Hz 800mA adapter / Internal rechargeable battery								
Operating Temperature	14° to 104°F / -10° to 40°C								
Housing	ABS plastic								
Overall Dim.	12.8"x14"x4.5" / 326x355x115mm (wxdxh)								
Net Weight	7.3lb / 3.29kg								
Approvals	N/A								

Accessories


Item number	Description
3074010267USB cable
302013912Hard carrying case with lock
2020013913In-use cover (pack of 5)
2020013914In-use cover (pack of 10)
3022013911In-use cover
1120011156ATP thermal printer
3126011263ATP thermal printer paper
3126011281ATP thermal printer paper (pack of 10)
3014011014RS-232 cable M-F
600002028AdamDU Data Collection Program
700660290Calibration certificate
1120014641AIP impact printer
2020013915USB option

Key Accessories



Printers

Easy-to-use features combined with quick set-up equals a truly versatile selection of printers.



AdamDU data collection program

Adam DU software connects a balance to the laboratory network, helping to achieve seamless data collection, transfer and analysis. DU features an easy-to-use interface with a main command window, allowing users to quickly collect information from up to eight Adam balances simultaneously using RS-232 or USB connections.

Supplied by