

Rotary Evaporators & Accessories



SCI20L-PRO Rotary Evaporator

20L capacity

The SCI20L-Pro is ideal for continuous distillation of many volatile solvents under reduced pressure. It offers an excellent distilling solution in a wide range of applications.



Features:

- Large LCD digital display with heating temperature, rotation speed, clockwise, anti-clockwise and timer;
- Simple automatic motorized lift (stroke 180mm), smooth and silent;
- Water/oil heating bath with wide temperature range from room temperature range to max. 180°C;
- Speed range from 10 to 150rpm, and interval operation in clockwise and anti-clockwise directions for drying process;
- Double-layer high-efficiency condensing tube with large condensation area and strong evaporation capacity, ensuring efficient sample recovery;
- Patented PTFE double sealing ring with excellent sealing performance.
- A switching valve for continuous collection without compromising the system vacuum and solvent distillation.



Large LCD display



Overheating protection



Chemical resistance

Rotary Evaporator



Double-layer high-efficiency condenser
 large condensation area and strong evaporation capacity, ensuring efficient sample recovery.



Switching valve design
 A switching valve for continuous collection without compromising the system vacuum and solvent distillation.



Heating bath

- Water & oil bath;
- Enhanced lifetime through exclusive use of corrosion-free stainless-steel;
- The heating bath has special heat insulation structure design, so that the surface temperature is far lower than the temperature in the bath, to help prevent accidental burns.

Specifications

		SCI20L-Pro
performance	Temperature range	Room temp. ~180°C (both water and oil)
	Control Accuracy	Water: ±1°C Oil: ±3°C
	Rotation Speed	10~150rpm
	Evaporation capacity	Max.4.0L/h (water vapor volume)
function	Ultimate vacuum	Less 2.6hpa
	Temperature control method	Micro processor PID control
	Display	LCD (temperature/speed/clockwise and Anti-clockwise/time)
	Stroke Displacement	Automatic 180mm
constitute	Safety features	Motor over-current protection, Residual Current Device, lifting overload protection, Boil-dry protection, over-temperature protection
	Sample flask	Round flask 20L
	Receiving flask	Round flask 10L with drain valve
	Condenser	Two-section vertical triple serpentine condenser, cooling surface 1.2m ²
Specification	Heating bath size	φ450×240mm
	Takeover caliber	Cooling/suction nozzle outer diameter 16mm, vacuum pump nozzle outer diameter 16mm
Dimension[D×W×H]		1160mm×600mm×1860mm
Power supply		220V/4600W/50/60Hz 380V/6000W/50/60Hz

SCI100-Pro Digital Rotary Evaporator




LCD Digital Rotary Evaporator is an essential instrument in chemical laboratories for the efficient and gentle removal of solvents from samples by evaporation. It offers an excellent distilling solution in a wide range of applications.

Features:

- Digital display of both rotation speed and heating temperature allows for optimal control of all distillation processes
- Automatic motor lift releases the evaporating flask to a safe position in case of power failure
- 5L heating bath with wide temperature range from room temp. to 180°C)
- Overheating protection temperature at 220°C
- Speed range from 20 to 280rpm, and interval operation in clockwise and anticlockwise directions for drying process
- Patented condenser (cooling surface 1700cm²) with excellent cooling effect
- Ejection mechanism ensures easy removal of evaporating flask
- Patented double spring sealing ring which is made of PTFE provides an excellent sealing performance
- Remote function provides PC control and data transmission



Large LCD display



USB connector



Chemical resistance



Overheating protection



Compatible with all range of glassware

Specifications

	SCI100-Pro
Motor Type	Brushless DC motor
Speed Range	20-280rpm
Display	LCD(speed,temperature, time)
Clockwise and Anti-clockwise	Yes
Heating Temperature Range	Room temp. to 180°C
Control Accuracy	±1°C
Heating Power	1300W
Stroke Displacement	automatic 150mm
Timer	Yes
Time Setting Range	1-999min
Dimension[D×W×H]	465×457×583mm
Weight	15kg
Permissible Ambient Temperature	5-40°C
Permissible Relative Humidity	80%RH
Protection Class	IP20
USB Interface	Yes
Voltage/Frequency	100-120/200-240V 50/60 Hz
Power	1400 W

Rotary Evaporator

The SCIOGEX SCI100-S Digital Rotary Evaporator is an excellent choice for evaporation, distillation and separation of chemicals. It can be used as a multifunctional system in combination with vacuum pump, vacuum controller and circulating refrigerators to provide excellent distillation solutions in many laboratory applications.

Features:

- 5L heating bath with a wide temperature range (room temp. to 180°C), independent temperature control, make it can be used separately. Water/oil heating mode can be changed only through a switch.
- Manual lift combined with auxiliary lift for precise positioning of the glassware.
- PID control ensures high temperature accuracy at $\pm 1^\circ\text{C}$ (water).
- Overheating protection temperature at 220°C
- Boil-dry protection, automatically power off if heating without water/oil in the heating bath.
- Speed range from 20 to 200rpm, timing interval operation in clockwise and anticlockwise directions for drying process.
- Patented condenser (cooling surface 1200/1700cm² for selection), double helix condensing tube + center circular arc design to speed up the flow rate of liquid with excellent cooling effect.
- Ejection mechanism ensures easy exchange of evaporating flask
- Adjustable immersion angle
- Patented double spring sealing ring which is made of PTFE provides an excellent sealing performance
- Remote function provides PC control and data transmission.
- Compatible with the entire range of RE100-Pro glassware.



USB connector



Chemical resistance




Overheating protection



Compatible with all range of glassware

SCI100-S LED Digital Rotary Evaporator

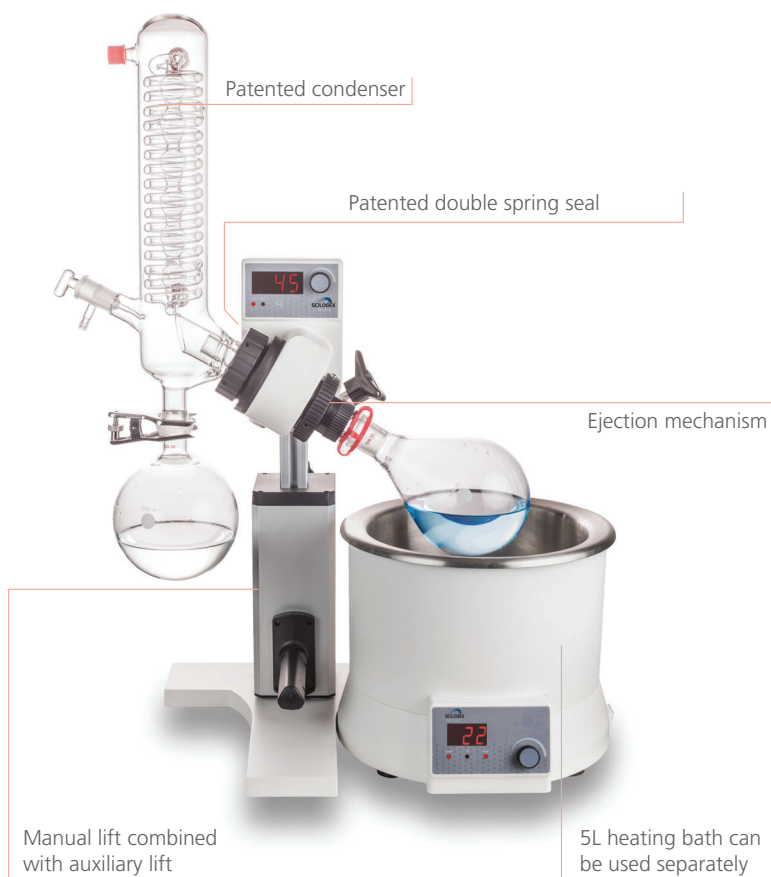

Specifications

	SCI100-S
Motor Type	Brushless DC motor
Speed Range	20-200rpm
Display	LED (speed, temperature, time)
Clockwise and Anti-clockwise	Yes
Heating Temperature Range	Room temp. to 180°C
Control Accuracy	water: $\pm 1^\circ\text{C}$ oil: $\pm 3^\circ\text{C}$
Heating Power	1010 W
Stroke Displacement	Manual 110mm + auxiliary 100mm
Interval Time Setting Range	1~999s
Dimension [D × W × H]	Main Unit: 440 × 320 × 450mm Heating Bath: 300 × 300 × 240mm
Weight	Main Unit: 7kg Heating Bath: 3kg
Permissible Ambient Temperature	5~40°C
Permissible Relative Humidity	80%RH
Protection Class	IP20
USB Interface	Yes
Voltage/Frequency	100~120/200~240V 50/60 Hz
Power	1100 W

Rotary Evaporator | Accessories

Condenser



Vertical

Cat. No.	Glassware type	Volume	Cooling surface
18900165	Evaporating flask(NS29/32) Receiving flask(KS35/20)	1000mL	1700cm ²
18900173	Evaporating flask(NS24/40) Receiving flask(KS35/20)	1000mL	1700cm ²
18900166	(COATED)Evaporatingflask(NS29/32) Receiving flask (KS35/20)	1000mL	1700cm ²
18900174	(COATED)Evaporatingflask(NS24/40) Receiving flask (KS35/20)	1000mL	1700cm ²
18202410	evaporating flask (NS 29/32) Receiving flask (KS 35/20)	1000mL	1200cm ²



Diagonal

Cat. No.	Glassware type	Volume	Cooling surface
18900163	Evaporating flask(NS29/32)Receiving flask(KS35/20)	1000mL	1700cm ²
18900171	Evaporating flask(NS24/40)Receiving flask(KS35/20)	1000mL	1700cm ²
18900164	(COATED)Evaporatingflask(NS29/32) Receiving flask (KS 35/20)	1000mL	1700cm ²
18900172	(COATED)Evaporatingflask(NS24/40) Receiving flask (KS35/20)	1000mL	1700cm ²



Heating Bath

Cat. No.	Description	Volume
18900201	Rotary Evaporator, 220V	5L
18900202	Rotary Evaporator, 110V	5L
18101888	LED heating bath, 220V	5L
18101936	LED heating bath, 110V	5L



Rotary Evaporator | Accessories

Glassware



Evaporating flask

Cat. No.	Volume	Size
18300116	50mL	NS 29/32
18300117	100mL	NS 29/32
18300118	250mL	NS 29/32
18300119	500mL	NS 29/32
18300120	1000mL	NS 29/32
18300121	2000mL	NS 29/32
18300655	50mL	NS24/40
18300201	100mL	NS 24/40
18300202	250mL	NS 24/40
18300203	500mL	NS 24/40
18300204	1000mL	NS 24/40
18300205	2000mL	NS 24/40



Receiving flask

Cat. No.	Volume	Size
18300107	100ml	KS 35/20
18300108	250ml	KS 35/20
18300109	500ml	KS 35/20
18300110	1000ml	KS 35/20
18300111	2000ml	KS 35/20



Distilling spider with 5 flasks(without flask)

Cat. No.	Volume	Size
18900194	/	NS 29/32, NS24/29
18900177	/	NS 29/42, NS24/40

Foam brake

Cat. No.	Volume	Size
18300093	250ml	NS 29/32
18300207	250ml	NS 24/40



Vapor tube

Cat. No.	Volume	Size
18100998	/	NS 29/32
18300206	/	NS 24/40

Connector

Cat. No.	Volume	Size
18300094	/	NS 29/32, NS24/29
18300095	/	NS 29/32, NS19/26
18300096	/	NS 29/32, NS14/23
18300199	/	NS24/40, NS19/22
18300200	/	NS 24/40, NS14/20
18900193	/	NS 24/40, NS 29/42

Low Temperature Circulator

SCIOGEX Low Temperature Circulator, is water-efficient and provides high cooling efficiency, capable of almost any cooling requirements in lab or industrial environments. With a compact structure and environment-friendly design, it is an ideal choice for labs.

SCIP5-20

Low Temperature Circulator

Features & Advantages

- Temperature range: -20 to room temperature
- Employs PID temperature control with built-in PT1000 temperature sensor that provides high accuracy of temperature control
- A crystal-clear LED display that switches between display of set temperature and that of actual temperature
- The entire unit is capable of protection against short circuit, over-current, overload and delayed start
- Integrated design of drain outlet and water outlet that allows easy drainage
- German-made compressor that is environment-friendly, low-noise and durable
- The compressor employs state-of-the-art R290 environment-friendly refrigerant to protect environment and human health



- The liquid pathway is made of stainless steel or high-quality corrosion-resistant material



- User-friendly operating panel for easy operation



- A large-volume open reservoir allows easy filling and supports cold trap experiments



- Casters for easy manoeuvrability



Low Temperature Circulator



Specifications

Range of temperature control
 Temperature adjustment accuracy
 Temperature control accuracy
 Reservoir capacity
 Range of temperature adjustment
 Temperature display
 Type of temperature sensor
 Compressor refrigerant
 Circulating pump throughput
 Circulating pump head
 In-out cycle interface
 RS232 interface
 Power
 Maximum overall dimensions
 Weight
 Power supply
 Operating environment

SCIP5-20

-20°C to Room temperature
 0.1°C
 ±0.5°C (0°C ~ 20°C typical value)
 5L
 -30°C~30°C
 LED
 PT1000
 R290
 12L/min
 6m
 12mm pagoda-type interface
 Yes
 700W
 440*460*730 (mm)
 50Kg
 110V 50Hz/60Hz
 10°C~4 0°C RH ≤80%

Cooling capacity

°C	-20	-13	-10	0	10	14	20
W	607	668	694	785	883	924	989

Vacuum Controller

The vacuum controller serves as a device for labs to display, adjust and control the degree of vacuum in vacuum systems. It generally constitutes the vacuum control system of rotary evaporator along with vacuum pump, which enables repeatable distillation experiment and recovery of many kinds of solvents in an efficient and automatic manner.

SCI100VC Vacuum Controller

Features

- A wide range of measurement and control, 1-1,000mbar
- Two control modes of single-point control and programmed control available for choice as needed
- Can store up to 5 programs, each containing up to 5 segments of programming control
- A large-size TFT touch screen display control allows easy operation
- All parts in contact with vapor or liquid are made of PTFE, ceramics or other high-performance materials and can effectively resist corrosion caused by organic solvents, water, acid and alkali
- A built-in vent valve can feed inert gas into system equipment
- One-stroke decompression allows easy installation and dismantling of vacuum system
- Can be connected with pump power control for temporary shutdown of pump power supply after reaching stable degree of vacuum for energy conservation and environmental protection. Can also be operated in the normally open statue of pump



Specifications

	SC100VC
Vacuum setting range	1-1000mbar
Vacuum measurement range	1-1000mbar
Control operation mode	Single-point control mode, Programmed control mode
Control program	Can store up to 5 programs, each containing 5-step control (capable to set the degree of vacuum and time)
Setting method	Touch screen setting
Display	5" TFT
Sensor overload pressure	1,500mbar
Connector diameter	8mm
Materials in contact with vapor	PTFE, PP, silicone and ceramics
Power	600W
Compatible conditions with vacuum pump	power of 50Hz vacuum pump ≤400W power of 60Hz vacuum pump ≤500W
Overall dimensionsW×D×H	189×207×193mm
Weight	4.0kg
Power supply	110—240V,50Hz/60Hz
Operating environment	10°C~40°C, ≤80%RH

MZ 1C Chemistry-design diaphragm pump

Specification

Number of heads / stages: 2 / 2
 Max. pumping speed: 0.75 m³/h
 Ultimate vacuum (abs.): 12mbar
 Nozzle Size: DN 8-10 mm
 Rated motor power: 0.06kW
 Rated motor speed: 1500/1800 rpm
 Noise level: 45dB
 ATEX: II 3G IIC T3 X Internal Atm. only

Cat. No.

Voltage

18900231	Cn plug, 100V-120V/200-230V 50Hz/60Hz
18900232	Euro plug, 100V-120V/200-230V 50Hz/60Hz
18900233	USA plug, 100V-120V/200-230V 50Hz/60Hz
18900234	UK plug, 100V-120V/200-230V 50Hz/60Hz



C410 Chemistry-design diaphragm pump

Specification

Maximum Vacuum: 13mbar
 Work Mode: In Successions
 Nozzle Size: 8mm, Power: 95W
 Motor speed: 1450rpm
 Flow Rate:


mbar	1000	880	750	600	480	280
L/min	25	22	20	12	7.5	5



Seals and other accessories

Cat. No.

Description

18202027	PTFE vacuum seal	
18900362	Ultra resistant FFKM seal for applications with highly abrasive solutions	
18900190	Evaporation flask clip (red) CS002440	
18900188	Evaporation flask clip (green) CS002942	

Vacuum regulator/moisture trap

Cat. No.

Description

18900186
 In use of control small volume, installed in a vacuum between DVR480 and vacuum system.
 Material: PVDF, PTFE, ABS, Borosilicate Glass, Stainless Steel

